


wings & fittings

section


- SINGLE ARCH MUDGUARDSg1-g3
- FLAT TOP MUDGUARDSg3
- TANDEM MUDGUARDSg4
- WING SPATSg4
- MUDGUARD STAYSg5
- MUDGUARD BRACKET CLAMPSg6-g7
- SPRAY SUPPRESSIONg8

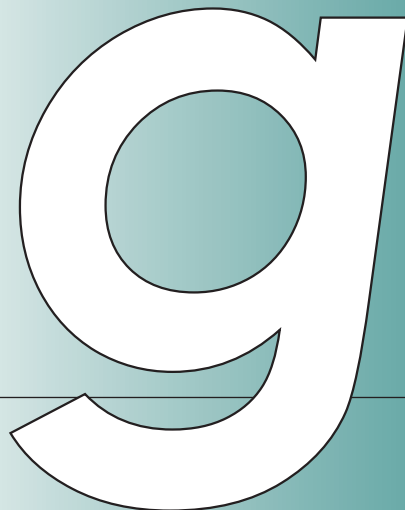

WINGS & FITTINGS



**thermoplastic
single-arch
mudguards**

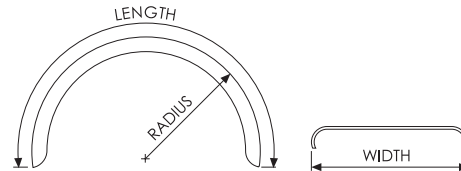


Bracket & stay **NOT** included, shown for visual purposes only

• SINGLE WHEEL • SINGLE WHEEL • SINGLE WHEEL • SINGLE WHEEL • SINGLE WHEEL • SINGLE WHEEL •									
PART NUMBER	NOMINAL DIMENSIONS			TYRE SIZES					
	WIDTH	RADIUS	LENGTH						
6777/001	205 (8")	410 (16")	1370 (54")	175 R 13 175 R 14 195/75 R 14	175/70 R 13 185 R 14 6.50 x 14	185/70 R 13 195 R 14 7.00 x 14	195/70 R 13 165/75 R 14 6.00 x 15	6.70 R 13 175/75 R 14 6.00 x 16	165 R 14 185/75 R 14
6777/050	255 (10")	470 (18.5")	1600 (63")	205 R 14 7.00 R 15 235/75 R 15 205/75 R 16 7 x 16 7 R 17.5 235/75 R 17.5	215 R 14 7.50 R 15 185 R 15 215/75 R 16 7.5 x 16 8 R 17.5 245/70 R 17.5	205/75 R 14 195/70 R 15 195 R 15 225/70 R 16 8.25 R 16 8.5 R 17.5	215/75 R 14 205/80 R 15 215 R 15 225/75 R 16 195 R 16 205/75 R 17.5	6.70 R 14 225/70 R 15 185/75 R 16 6 x 16 205 R 16 215/75 R 17.5	6.70 R 15 225/75 R 15 195/75 R 16 6.50 x 16 215 R 16 225/75 R 17.5
6777/075	275 (10.75")	408 (16")	1246 (56")	215/70R 15	195R 15	205R 15	205/80R 15	215R 16S	205R 16
6777/250	420 (16.5")	635 (25")	2070 (81.5")	11 R 20 12/80 R 22.5 14.5 R 24	12.5 R 20 15 R 22.5 285/75 R 24.5	14/80 R 20 295/80 R 22.5 305/75 R 24	375/75 R 20 365/80 R 22.5 11 R 24.5	365/80 R 20 375/70 R 22.5	11 R 22 385/65 R 22.5
• TWIN WHEEL • TWIN WHEEL • TWIN WHEEL • TWIN WHEEL • TWIN WHEEL • TWIN WHEEL • TWIN WHEEL •									
6777/200	420 (16.5")	445 (17.5")	1450 (57")	6.70 R 14 175/75 R 16	6.70 R 15	185 R 15	6.00 R 16	6.50 R 16	175 R 16
6777/350	425 (16.75")	410 (16")	1289 (50.75")	5.60 R 12 175 R 13 175 R 14	155/70 R 12 185/70 R 13 175/75 R 14	155 R 13 195/70 R 13 185 R 14	155/70 R 13 6.70 R 13 185/75 R 14	165 R 13 165 R 14	175/70 R 13 165/75 R 14
6777/450	480 (19")	480 (19")	1510 (59.5")	205/75 R 14 205 R 16 8 R 17.5	205/65 R 15 215 R 16	205/80 R 15 205/75 R 16	7.00 R 15 7 R 16	7.50 R 15 8 R 16	7.00 R 16 7 R 17.5
6777/750	500 (19.5")	500 (19.5")	1653 (63")	215 R 14 7.50 R 16	215/75 R 14 8.50 R 17.5	225/70 R 15 205/75 R 17.5	225/75 R 15	215/75 R 16	225/70 R 16
6777/800	530 (21")	580 (23")	1860 (73")	9.00 R 16 9 R 22.5	8.25 R 17 215/70 R 22.5	9.50 R 19.5 215/75 R 22.5	7.50 R 20	8.25 R 20	8 R 22.5
6777/850	530 (21")	510 (20")	1600 (63")	8.25 R 15 215/75 R 17.5 7.00 R 20	235/75 R 15 225/75 R 17.5	225/75 R 16 235/75 R 17.5	8.25 R 16 8 R 19.5	9.5 R 17.5 9.00 R 19.5	10 R 17.5 6.50 R 20
6777/1000	610 (24")	535 (21")	1675 (66")	10 R 15 265/70 R 17.5	225/75 R 15 275/75 R 17.5	255/75 R 15 245/70 R 19.5	265/70 R 15 265/70 R 19.5	245/70 R 17.5 285/70 R 19.5	245/75 R 17.5
6777/1050	615 (24.25")	635 (25")	1995 (78.5")	11.00 R 16	10.00 R 20	11.00 R 22	11 R 22.5	275/80 R 22.5	
6777/1100	650 (25.5")	650 (25.5")	2040 (80.25")	11.00 R 20	285/75 R 22.5				
6777/1300	670 (26.5")	685 (27")	2160 (85")	12.00 R 20	12 R 22.5	11 R 24	12.00 R 24	11 R 24.5	

- Unique, ribbed styling with integral reflectors •
- Manufactured from 'Super Linear' polyethylene, giving increased rigidity with greater impact & 'cold crack' resistance.
- Resistance to wider range of corrosive chemicals. •
- Excellent design aesthetics & greater performance achieved when used in conjunction with 6781 brackets (page g6).

PARLOK thermoplastic single-arch mudguards

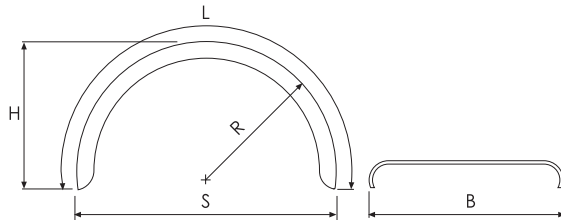

PART NO.	B	L	R	S	H	WHEELS	TYRE RECOMMENDATION
6786/404	415	1420	420	840	460	TWIN	750R14, 185R15, 670R15, 175R16, 175/75R16, 185/75R16
6786/450	450	1300	420	840	410	TWIN	175-185R16, 175R13, 185R13, 6.50x14, 6.70x14, 7.00x14, 165R14, 165R16, , 205/80R15
6786/405	405	1930	635	1270	595	SINGLE	385/65R22.5, 365/80R20, 11R22.5, 15R22.5, 12R22.5, 13R22.5, 13/70R22.5, 13/80R22.5, 13.00R20, 14.25/80R20
6786/455	455	1650	480	960	560	TWIN	205/65R17.5, 8.5R17.5, 8.25x15, 7.00x16, 7.25x16, 7.50x16, 8.25x16, 8.25x17
6786/500	500	1700	500	1000	510	TWIN	235R14, 225/75R16, 9R16, 235R16, 215/75R17.5, 225/75R17.5, 9R17.5, 7.50R20
6786/540	540	1700	500	1000	500	TWIN	235R14, 10R15, 255/75R15, 225/75R16, 9R16, 235R16, 215/75R17.5, 225/75R17.5, 9R17.5, 245/70R17.5, 235/75R17.5
6786/550	550	1700	550	1100	530	TWIN	245/70R19.5, 10R15, 255/75R15, 245/70R17.5, 9.5R17.5, 9R19.5, 245/75R19.5, 245/70R19.5, 8R22.5, 9R22.5, 255/70R22.5, 10/70R22.5
6786/610	610	1930	640	1270	610	TWIN	11R22.5, 10.00x20, 11.00x20, 10R22.5, 275/80R22.5, 11/70R22.5, 9.00R20, 275/70R22.5
6786/650	650	1900	620	1260	590	TWIN	305/70R19.5, 12.00x20, 12/70R22.5, 295/80R22.5, 305/70R22.5, 275/70R22.5, 295/75R22.5, 285/80R22.5
6786/6506	650	2100	630	1260	730	TWIN	12R22.5, E20, 295/80R22.5, 305/75R24.5, 295/75R22.5, 285/80R22.5
6786/670	670	2090	670	1360	660	TWIN	12.00x20, 12R22.5, 305/75R24.5, 315/75R24.5
6786/680	680	2100	630	1260	730	TWIN	12/70R22.5, 12.00x20, 12R22.5, 13R22.5, 315/70R22.5, 315/80R22.5, 315/75R24.5, 12/80R22.5

Mudguards are supplied in pairs & packed in a protective polyethylene sleeve. Other sizes available on request.

QUALITY ASSURED

process type manufacturing technique ensures accurate material thickness.

RESILIENT

excellent resistance to tear and impact damage

DURABLE


high resistance to temperature extremes; -50°C to +80°C

TOUGH

manufactured from high density polyethylene




CENTOPLAS®
thermoplastic single~arch
mudguards

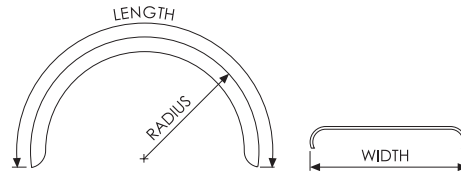

PART NUMBER	NOMINAL DIMENSIONS			TYRE SIZES					
	WIDTH	RADIUS	LENGTH						
3021/060	150 (6")	290 (11.5")	965 (38")	4.00R 10					
3021/070	180 (7")	380 (15")	1220 (48")	5.90R 15					
3021/080	205 (8")	405 (16")	1370 (54")	6.40R 14	6.50R 14	6.50R 15	7.00R 14	165R 14	165R 16
				185R 16	205R 14				
3021/090	230 (9")	460 (18")	1525 (60")	7.00R 15	7.00R 16	18R 17.5	215/75R 17.5	225/75 17.5	235/75R 17.5
				215R 14					



thermoplastic
single~arch
mudguards




PART NUMBER	NOMINAL DIMENSIONS				TYRE SIZES				
	WIDTH	HEIGHT	RADIUS	LENGTH					
6777/430	470 (18.5")	525 (20.5")	500 (19.5")	500 (19.5")	7.50 R 16	8.5 R 17.5	205 R 16		
6777/440	470 (18.5")	450 (18")	450 (18")	500 (19.5")	185 R 14	205 R 14	215 R 14	185 R 15	175 R 16
					185 R 16	7.25 R 16			
6777/650	500 (19.5")	580 (23")	500 (19.5")	505 (20")	205 R 16	205/75 R 17.5	215 R 16	8 R 17.5	8.25 R 15
					8.5 R 17.5				
6777/875	550 (21.5")	560 (22")	555 (21.75")	650 (25.5")	8.25 R 15	225/75 R 16	8 R 18	8.5 R 16	215/75 R 17.5
					225/75 R 17.5				
6777/1110	650 (25.5")	715 (28")	660 (26")	750 (29.5")	11 R 22.5	12 R 22.5	295/80 R 22.5		

- FLAT-TOP DESIGN FOR DIRECT FIXING.
- SUPERIOR BUMP AND COLLISION RESISTANCE.
- ADVANCED COLD CRACK PROPERTIES.
- RESISTANT TO MOST CHEMICALS.

- FULL 2.2% CARBON BLACK CONTENT (BLACK GUARDS) OR UV STABILISER PACKAGE (ALL COLOURS) TO ENSURE EXCELLENT RESISTANCE TO THE ELEMENTS.
- AVAILABLE IN BLACK, AND OVER 60 FLEET COLOURS


CENTOPLAS® thermoplastic tandem mudguards

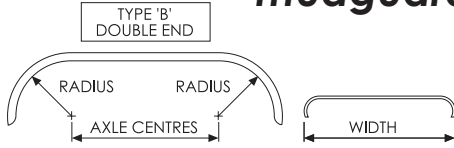

• SMALL TANDEM • SMALL TANDEM • SMALL TANDEM • SMALL TANDEM • SMALL TANDEM •						
PART NUMBER	NOMINAL DIMENSIONS			TYPE	TYRE SIZES	
	WIDTH	RADIUS	AXLE CENTRE			
3020/6240	150 (6")	330 (13")	610 (24")	B	145 x 10S	520 x 10S
3020/7330	180 (7")	380 (15")	838 (33")	B	165 x 13S	560 x 13S
3020/8290	205 (8")	380 (15")	736 (29")	B	175 x 13S	670 x 13S


- SUPERIOR BUMP AND COLLISION RESISTANCE
- ADVANCED COLD CRACK PROPERTIES
- RESISTANCE TO MOST CHEMICALS.
- ALL MUDGUARDS ARE PACKED IN A PROTECTIVE POLYTHENE BAG

WING SPAT								
Black thermoplastic. Unique lightweight styling – advanced design. Full 2.2% Carbon Black content to ensure resistance to the elements. Resistance to most chemicals. Excellent impact and cold crack resistance.								
	A	B	C	D	E	F	G	H
6777/3032								
METRIC (mm)	300	320	200	130				
IMPERIAL (ins)	11.8	12.6	7.87	5.12				
6777/4035								
METRIC (mm)	400	350	230	130				
IMPERIAL (ins)	15.8	13.8	9.06	5.12				
6777/4540								
METRIC (mm)	450	400	245	145				
IMPERIAL (ins)	17.7	15.8	9.65	5.71				
6777/5250								
METRIC (mm)	520	500	290	180				
IMPERIAL (ins)	20.5	19.7	11.4	7.09				
6777/6050								
METRIC (mm)	600	500	290	180				
IMPERIAL (ins)	23.6	19.7	11.4	7.09				
6777/6550								
METRIC (mm)	650	600	300	180				
IMPERIAL (ins)	25.6	23.6	11.8	7.09				
6777/6960								
METRIC (mm)	690	600	300	180				
IMPERIAL (ins)	27.2	23.6	11.8	7.09				

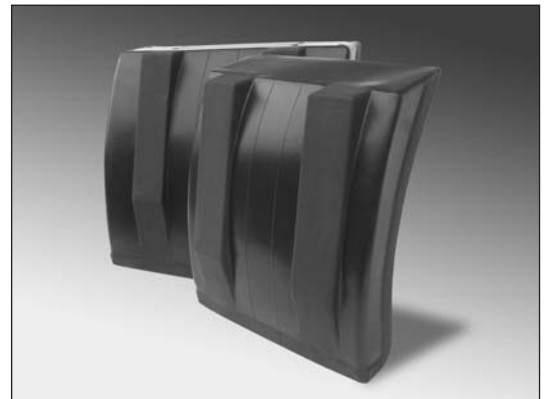



		A	B	C	D	E	F	G	H
3029/5550		Weight 1.6kg/3.5lb							
METRIC (mm)		550	34.0	66.0	6.00	100	40.0	M16	
IMPERIAL (ins)		21.7	1.34	2.60	0.24	3.94	1.58		
3029/5650		Weight 1.8kg/4lb							
METRIC (mm)		650	34.0	66.0	6.00	100	40.0	M16	
IMPERIAL (ins)		25.6	1.34	2.60	0.24	3.94	1.58		

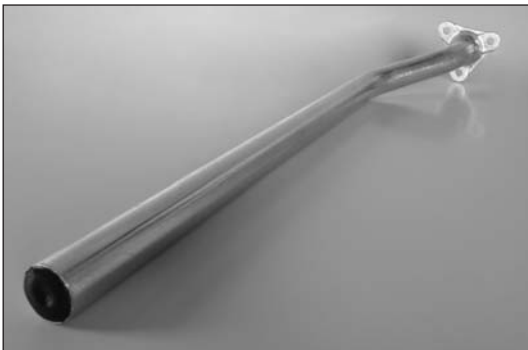

		A	B	C	D	E	F	G	H
3029/7800		Weight 2.2kg/4.9lb							
METRIC (mm)		800	34.0	86.0	10.0	100	10.0	80.0	
IMPERIAL (ins)		31.5	1.34	3.39	0.39	3.94	0.39	3.15	



		A	B	C	D	E	F	G	H
3029/4660		Weight 1.8kg/4lb							
METRIC (mm)		660	34.0	86.0	10.0	10.0	80.0		
IMPERIAL (ins)		26.0	1.34	3.39	0.39	0.39	3.15		

WING STAY BRACKET CLAMPS

A unique bracket clamp system designed for use with the new generation 6777 mudguards (refer g1):

- Lightweight plastic design
- Unique stylish appearance
- No unsightly nuts & bolts
- Bracket clamps hold the stay off the mudguard thus eliminating water traps - reducing rust problems
- Quick & easy to fit - faster routine maintenance
- Innovative clamping action 'Grips' the mudguard securely.

6781/00354 Suitable for Ø35mm tubes

Complete kit suitable for one mudguard includes 4 bracket sets.

6781/00424 Suitable for Ø42mm tubes


Complete kit suitable for one mudguard includes 4 bracket sets.

Main image shows one complete set, each assembly consists of 4 sets. Inset shows brackets fitted to wing stay (not included - refer g5).



		'UNIFIX' MUDGUARD BRACKET CLAMPS							
		Black, polyamide plastic. Fits to mudguards by only one bolt. Adjustable to fit stays from Ø32mm to Ø42mm. Full fitting instructions supplied.							
		A	B	C	D	E	F	G	H
3027/005		Pack of 4				Weight 110g/3.9oz			
METRIC	(mm)	90.0	44.0	34.0	68.0	15.0			
IMPERIAL	(ins)	3.54	1.73	1.34	2.68	0.59			



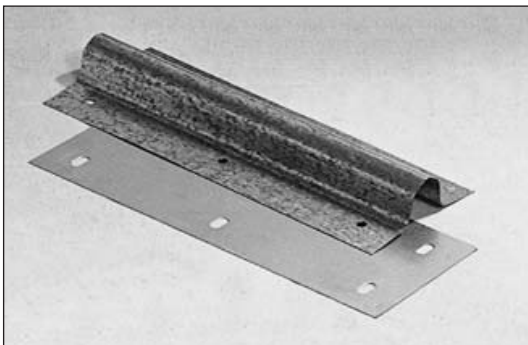

U BOLT CLAMP KITS

A complete kit contains enough components to fit one pair of mudguards. Each kit consists of:


- 4 x galvanised steel back plates
- 8 x zinc plated steel U bolts
- 8 x black neoprene, anti-slip sleeves
- 16 x flat steel washers
- 16 x nyloc nuts

6777/0035 Suits mudguards up to 570mm wide
6777/0037 Suits mudguards over 570mm wide

Assemblies to suit Ø35mm wingstays

6777/0042 Suits mudguards up to 570mm
6777/0044 Suits mudguards over 570mm


Assemblies to suit Ø42mm wingstays

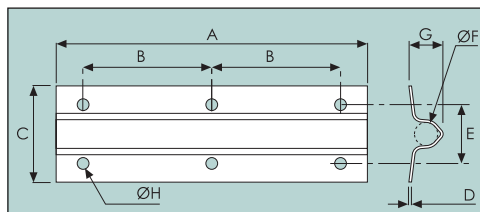

SADDLE BRACKET

Galvanised, mild steel.
For use with 3030/022
backplate.
To suit Ø34mm stays.

	A	B	C	D	E	F	G	H
3030/021	Weight 370g/13oz							
METRIC (mm)	400	165	109	1.00	71.0	34.0	36.0	9.00
IMPERIAL (ins)	15.8	6.50	4.29	0.04	2.80	1.34	1.42	0.35

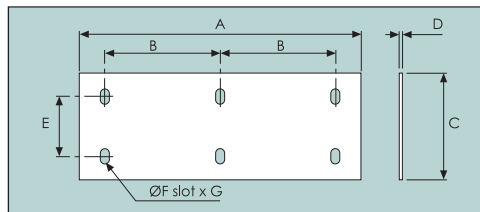

BACKPLATE

Galvanised, mild steel.
For use with 3030/021
saddle bracket.

	A	B	C	D	E	F	G	H
3030/022	Weight 370g/13oz							
METRIC (mm)	400	165	150	1.00	66.0	10.0	20.0	
IMPERIAL (ins)	15.8	6.50	5.91	0.04	2.60	0.39	0.79	

SPRAY SUPPRESSION MUDFLAPS

Renowned as a market leading spray suppression system, Clear Pass mudflaps are fitted as standard by many truck and trailer OEMs. They can reduce wheel rain spray by over 70%, providing safer passing opportunities for other road users;

- Lightweight - only 5.75kg per square metre
- Quick & easy to fit - no cutting required
- Excellent anti-sail properties
- BS AU200/2A; A e6 2020 approved



• SPRAY SUPPRESSION MUDFLAPS • SPRAY SUPPRESSION MUDFLAPS • SPRAY SUPPRESSION MUDFLAPS •								
PART NO.	WIDTH	LENGTH	PART NO.	WIDTH	LENGTH	PART NO.	WIDTH	LENGTH
5403/1622	400 (15.75")	560 (22")	5403/2422	610 (24")	560 (22")	5403/2448	610 (24")	1220 (48")
5403/1822	460 (18")	560 (22")	5403/2622	660 (26")	560 (22")	5403/2648	660 (26")	1220 (48")

RUBBER MUDFLAPS

Designed to withstand cracking, fraying, abrasion, disintegration from water absorption, contamination from exhaust fumes, oil and road dirt over a wide range of ambient temperatures, at the same time they are sufficiently rigid to do a good job of controlling road dirt and spray thrown up by the road wheels.

Moulded from reinforced rubber with square tops and radiused bottom corners, strengthening ribs and fixing holes.



• RUBBER MUDFLAPS • RUBBER MUDFLAPS • RUBBER MUDFLAPS • RUBBER MUDFLAPS •									
PART NO.	WIDTH	LENGTH	PART NO.	WIDTH	LENGTH	PART NO.	WIDTH	LENGTH	
2678/001	406 (16")	305 (12")	2678/009	560 (22")	406 (16")	2678/224	610 (24")	305 (12")	
2678/002	457 (18")	305 (12")	2678/010	508 (20")	457 (18")	2678/422	560 (22")	356 (14")	
2678/003	508 (20")	305 (12")	2678/011	533 (21")	457 (18")	2678/624	610 (24")	406 (16")	
2678/004	533 (21")	305 (12")	2678/012	560 (22")	457 (18")	2678/700	508 (20")	356 (14")	
2678/005	560 (22")	305 (12")	2678/212	305 (12")	305 (12")	2678/815	380 (15")	457 (18")	
2678/006	457 (18")	406 (16")	2678/214	356 (14")	305 (12")	2678/823	584 (23")	457 (18")	
2678/007	508 (20")	406 (16")	2678/219	483 (19")	305 (12")	2678/824	610 (24")	457 (18")	
2678/008	533 (21")	406 (16")	2678/698	TOP=152 (6"), BOTTOM=216 (8.5"), TAPERED LENGTH=241 (9.5")					

MONOGRAMMED MUDFLAPS

a most cost effective form of advertising

- OUR EXTENSIVE FACILITIES AND GRAPHIC EXPERIENCE ENABLES US TO REPRODUCE YOUR MESSAGE OR COMPANY LOGO FROM ANY SOURCE AND TO ITS FULL ADVANTAGE. WE MAKE SURE YOUR MESSAGE GETS ACROSS.
- SINGLE OR MULTI-COLOUR PRINTING
- ALL ARTWORK AND SCREENS ARE RETAINED TO ENABLE FASTER REPEAT ORDERS.

WINGS & FITTINGS