


BE 61 SERIES		RIVET-STAINLESS STEEL STEM-STAINLESS STEEL					
SNAP HEAD	Part No.	'A'	'B'	'D'	'M'	Grip Range	Hole Dia.
	BE61/0611	4.8	9.6	1.5	12.8	1.5-3.5	4.9-5.1
	BE61/0614	4.8	9.6	1.5	15.4	3.5-6.0	4.9-5.1
	BE61/0618	4.8	9.6	1.5	18.4	6.0-8.5	4.9-5.1

All dimensions in mm, and are nominal.
Information above is issued as a guidance only.


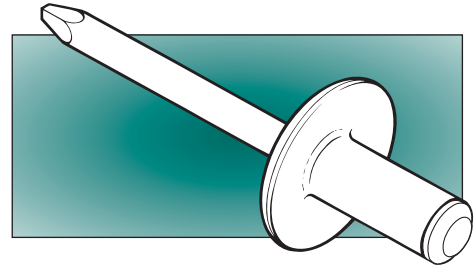


Avinox

Avinox is a variation of the Avex rivet but manufactured from stainless steel. It is particularly recommended for use in applications exposed to highly corrosive environments or demanding climatic conditions. These can include ventilation, hospitals, catering, or off-shore industries.




PLACING SEQUENCE

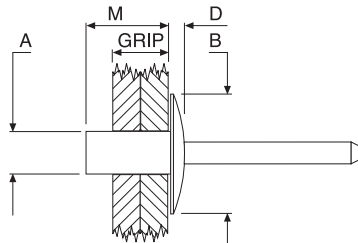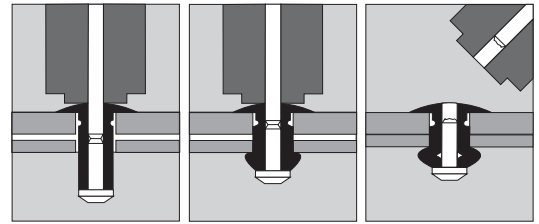


SR01 SERIES		RIVET-ALUMINIUM ALLOY STEM-CARBON STEEL, PHOSPHATED					
RAISED HEAD	Part No.	'A'	'B'	'D'	'M'	Grip Range	Hole Dia.
	SR01/3212	3.2	6.0	0.9	12.5	6.5-8.0	3.3-3.4
	SR01/4011	4.0	8.0	1.3	11.0	5.0-6.5	4.1-4.2
	SR01/4080	4.0	8.0	1.3	8.0	0.0-3.5	4.1-4.2
	SR01/4811	4.8	9.5	1.5	11.0	5.0-6.5	4.9-5.0
	SR01/4812	4.8	9.5	1.5	12.5	6.5-8.0	4.9-5.0
	SR01/4814	4.8	9.5	1.5	14.0	8.0-9.5	4.9-5.0
	SR01/4818	4.8	9.5	1.5	16.0	9.5-11.0	4.9-5.0

All dimensions in mm, and are nominal.
Information above is issued as a guidance only.
Other sizes available on request.

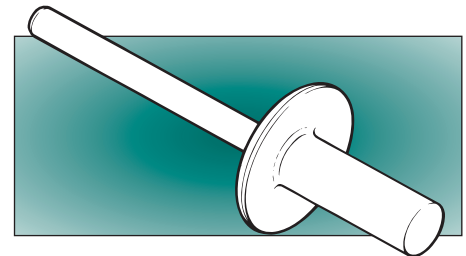

Sealed rivet

A completely sealed rivet which is specifically designed for applications where a fastener has to be either water or gas-tight. The protruding side of the rivet is completely sealed so that there is no possibility of the stem falling out. As there is no blind side exposure, corrosion resistance is greatly improved.



PLACING SEQUENCE

