


		SEMI-RECESSED ROOF-VENT							
		'Mira' approved. Supplied with 40mm inner trim ring (see below), cutout template & dome. Dome secured with stainless steel 'Torx' screws'							
		A	B	C	D	E	F	G	H
2539/012	12v - White dome	Weight 2.2kg/4.9lb							
2539/024	24v - White dome	Weight 2.2kg/4.9lb							
2540/1240	12v - Yellow dome	Weight 2.2kg/4.9lb							
2540/2440	24v - Yellow dome	Weight 2.2kg/4.9lb							
METRIC (mm)		320	95.0	65.0	240	8.00			
IMPERIAL (ins)		12.6	3.74	2.55	9.50	0.32			



PACET ROOF VENTS
Low Profile, Positive Ventilation

		SEMI-RECESSED ROOF-VENT							
		'Mira' approved. Supplied with 40mm inner trim ring (see below), cutout template & dome. Dome secured with stainless steel 'Torx' screws'							
		A	B	C	D	E	F	G	H
2550/1240	12v - White dome	Weight 2.2kg/4.9lb							
2550/2440	24v - White dome	Weight 2.2kg/4.9lb							
2560/1240	12v - Yellow dome	Weight 2.2kg/4.9lb							
2560/2440	24v - Yellow dome	Weight 2.2kg/4.9lb							
METRIC (mm)		320	95.0	65.0	240	8.00	362		
IMPERIAL (ins)		12.6	3.74	2.55	9.50	0.32	14.3		

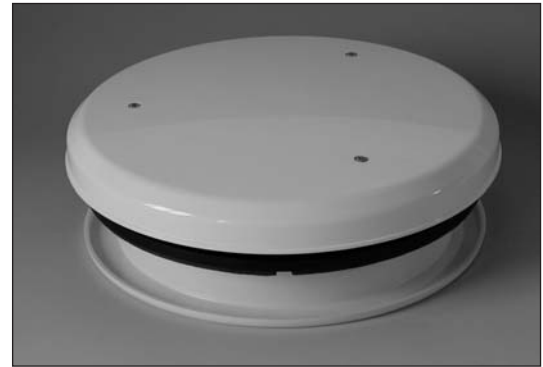

PACET ROOF VENTS
Low Profile, Positive Ventilation

		INTERIOR TRIM RING							
		White ABS. Supplied with 2539, 2540, 2550 & 2560 vents.							
		A	B	C	D	E	F	G	H
METRIC (mm)		302	250	42.0	9.00				
IMPERIAL (ins)		11.89	9.84	1.65	0.35				

Specifications:

Dome	UV stable Polycarbonate White or Yellow (RAL 1016)
Shroud	Nylon & glass fibre
Blade	Nylon & glass fibre
Trim Ring	White ABS (black available on request)
Motor/Fixings	316 Stainless steel
Aperture required:	242mm
Above roof line:	65mm approx depending on seal compression.
Motor:	12V or 24V; 80 Watt
Amp draw:	4.5 @ 12V & 3.0 @ 24V
Extraction:	1697m ³ /h max

MIRA approved and fitted by OEMs on vehicles used by police, ambulance services, community transport, bus manufacturers, and due to highly efficient extraction rates - particularly suitable for any vehicles carrying livestock. Other applications include off-road vehicles, agricultural vehicles and motorhomes as well as marine and inland water craft.

With key features such as a built-in safety mesh (protecting fingers & hair!), a unique chassis construction with a moulded flexible seal to eliminate cold drafts when not in use (without sacrificing air extraction performance) and a long life motor with twin ball bearings all Pacet motorised vents are supplied pre-assembled to aid easy 1 man installation.

All vents are supplied with a 40mm, white ABS, interior trim ring which will suit most applications with roof thicknesses between 33mm and 52mm. A 10mm trim ring is available to suit single skin roof applications and for vehicles with a more substantial roof or a false ceiling a 60mm ring is available on request.

Full fitting instructions and a cutout template are supplied with each vent along with self adhesive foam inserts for use on vehicles with a ridged roof.